

The MLG-WCT-1700-5A Series provide precision measurement for sub-metering, controls and energy management without dismantling the main line. Ergonomically designed with secured latch and keying hole for locking or servicing tag, this CT is the most popular among the MLG-WCT Series.



FEATURES

- 1.3" x 1.7" window opening (ID)
- Secured latch & keying hole for locking/service tag
- Swing open for ease of installation
- Rigid housing case with UL 94V-0 durable plastic
- 6ft black/white twisted pair leads— 16AWG
- Wire leads—UL1015 105°C 600V

APPLICATIONS

- Energy and sub-metering products
- Electrical load monitoring
- Network equipment
- Instruments and sensors
- Control systems
- Go GREEN initiatives

SPECIFICATIONS


- Standard Input Current 100-400A
- Frequency 50Hz — 400Hz
- Custom design Turns-Ratio available
- Standard accuracy 0.5 — 1.0
- Approximate weight 1.1Lbs
- ANSI C57.13 and C12.20 Standards

Specifications subject to change without notice

STANDARD PART-NUMBERS

MEASURLOGIC P/N	CURRENT RATIO	BURDEN (VA)	ACCURACY @ 60Hz
MLG-WCT-1700-100-5A	100:5	1.50	1.00
MLG-WCT-1700-200-5A	200:5	1.75	0.75
MLG-WCT-1700-300-5A	300:5	2.25	0.50
MLG-WCT-1700-400-5A	400:5	2.75	0.50

DIMENSIONS (Inches)

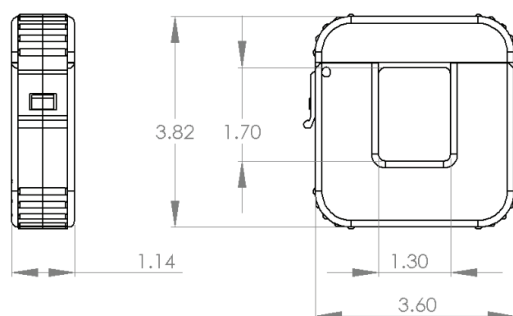

CAUTION

Before installation, safety precautions must be followed by licensed professional. Never energize primary unless short circuited terminals or burden connected to secondary.



© 2013 Measurlogic Inc.